


Assembly for 2 and 3 Pack Models

Estimated install time 25 minutes

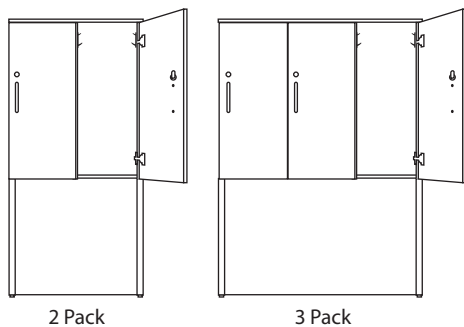

1. Unpack all components and verify correct hardware and tools (electric drill with Phillips bit), a level and 1/4" drive socket for levelers
2. Place modesty panel flat on floor with top facing away
3. Place one leg on the left hand side of modesty panel and install four screws (Fig. 1)
4. Repeat Step 3 with right leg
5. Lay down locker cabinet(s) on its/their backs.
6. If installing a four pack unit, refer to locker ganging instruction in kit provided. If installing a two or three stall unit go to next step
7. Align back and legs to the underside of the locker and install screws using the pilot holes provided (Fig. 2)



Fig. 1



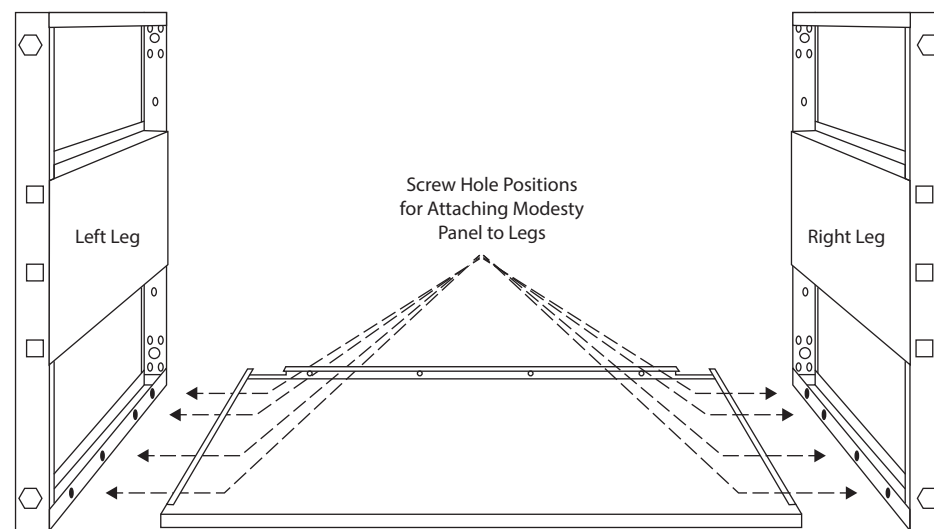



Fig. 2

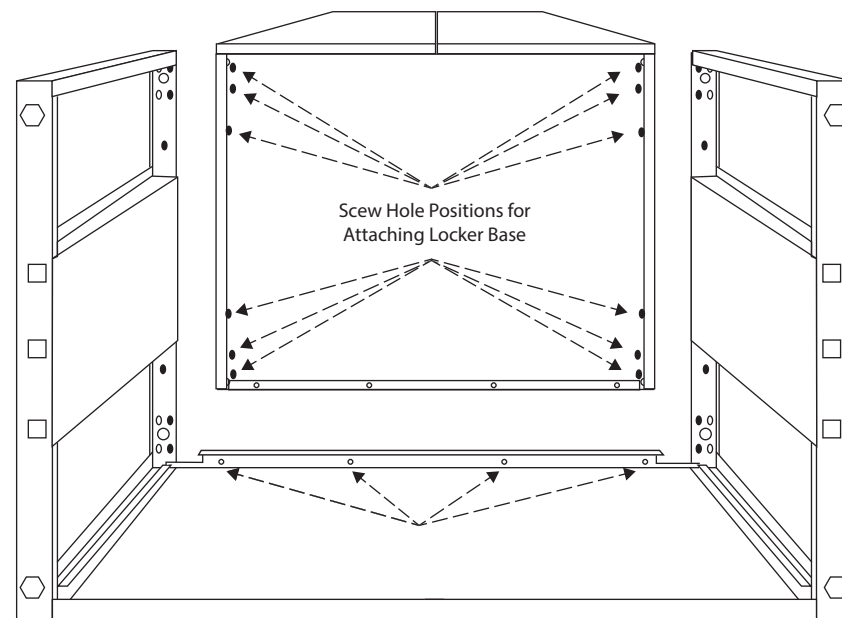

electric drill/driver



#2 Phillips



1/4" hex socket



level



#10 x 1/2" Phillips
pan head screws

8. Tip cabinet up and move to final location
9. Using a level and the ¼" drive socket level unit by adjusting the glides inside the legs (Fig. 3)
10. Install four cover panels by first engaging the bottom of the panel and tipping them vertical. These are friction fit and will need a small amount of force/pushing to seat (Fig. 4)

Fig. 3

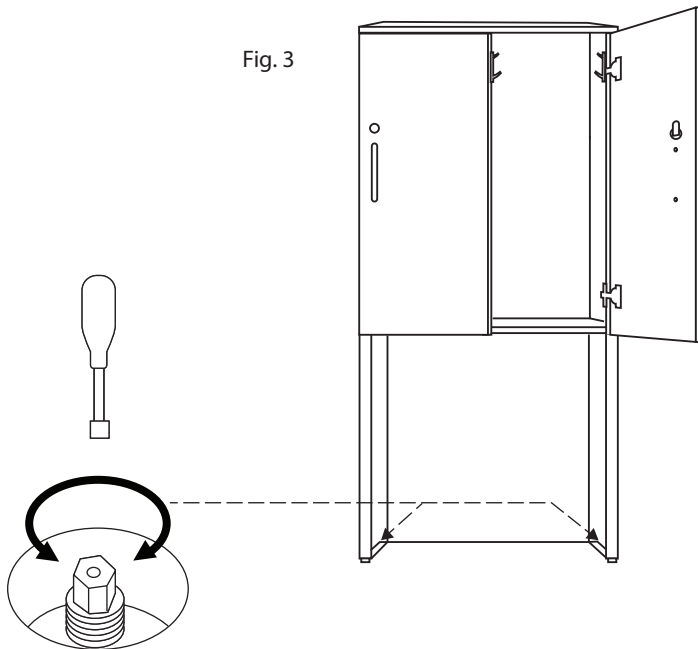


Fig. 4

